
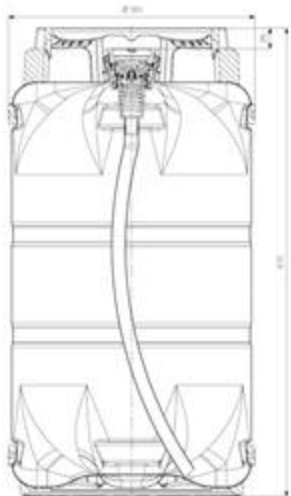


PRODUCT SHEETS

Dolium® 30L

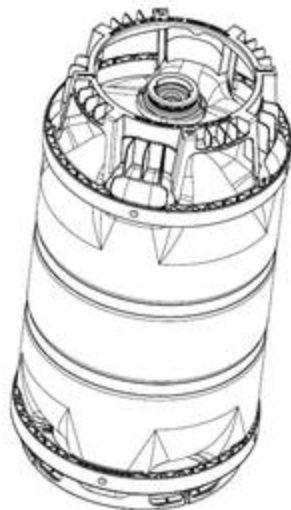

KEG SINGLE USE

30L	Volume	20L
301 mm	Diameter	301 mm
572 mm	Height	428 mm
Weight (empty)	1,20 kg	
Temperature	0°C < T < 35°C	
Pre - pressure	1,0 bar CO ₂	
Working pressure	3,5 bar max.	
Pressure Relief Valve	5,2 bar +/- 0,2	

CONTAINER

Oxygen ingress	Active barrier
Carbondioxide loss	Passive barrier
UV transmission	UV light barrier

CONNECTION TYPES and ORDER CODES


10-30S-02	Well - S(ankey)	10-20S-02
10-30A-02	Flat - A(lumas c)	10-20A-02
10-30G-02	Trilobe - G(rundy)	10-20G-02

CHIMES

Handling	Vertical - Horizontal
Storage	Stackable

APPLICATIONS

Products	Beverages
Shelf life	Equal to stainless steel
Certificates	EU / FDA
Filling line	compatible
Draught installation	compatible
Recycable	100%

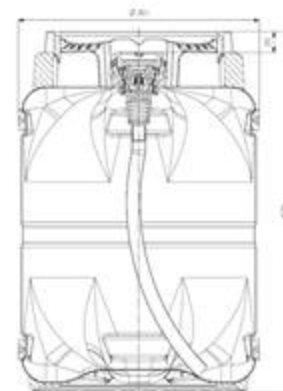

Dolium® 20L

Average content values

	0 bar	1 bar	2 bar	3 bar
20L	20.04 L	20.42 L	20.62 L	20.80 L
30L	30.48 L	30.93 L	31,10 L	31,80 L



P work	3,5 bar (50 psi)
PRV	5,2 bar (72 psi)
P burst	> 7 bar (> 100 psi)



Keg type : one way 30 L beer keg

Weight : 1,20 kg

Material : virgin HDPE – 2 Chimes, black (590 gr)
virgin LDPE – 1 diptube (12 gr)
body – Amber coloured virgin PET (475 gr)
1 metal spring (26 gr)
spear S, A & G in PA & GF (ca 125 gr)

CO2 : via a pressure release valve,
the CO2 in the container can be safely released manually